

PANEL PC POC-22® & PANEL PC POC-24®


Rendez conformes vos blocs
opérateurs

SYSTÈME D'INFORMATION SUR LA SANTÉ

Normé bloc opératoire, Technologie Haute Performance.
Core i5 12ème génération. Produit le plus diffusé d'Europe



Existe en 24 pouces

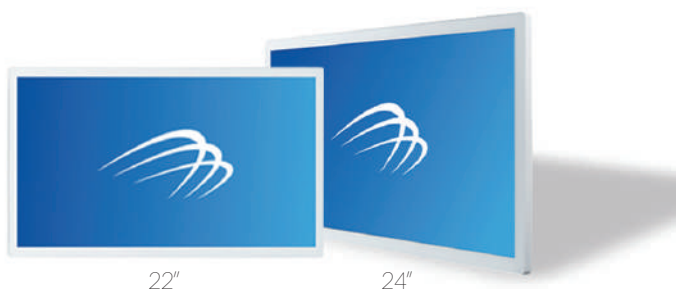

22"

24"



FANLESS

Caractéristiques

- Intel® Aider lake Core i5 intégré
- 8GO RAM en standard (extensible à 16GO)
- Taille écran 21.5" (existe en 24 pouces), affichage Full HD, Résolution 1920x1080
- Support multi-touch PCAP 10 points.
- 3 x USB3.1, 3 x USB 2.0, 2 x ports COM RS 232, 1 x DP (par USB-C), 1 x LAN, 1 x RJ11
- Intel F/W TPM 2.0.
- Étanche et nettoyable IP65 en façade et conformité VESA
- En option : Module WiFi/BT
- Fanless : système sans ventilateur

SPECIFICATIONS TECHNIQUES

Information system	
Processor	Intel® i5-1235U @ 1.3GHz up to 4.4 GH
System Memc	1 x SO-DIMM DDR5 slot, 16GB RAM as standard
Intel AMT	i5 CPU only
TPM	Intel F/W TPM 2.0
System fan	Fanless
OS support	Windows 10/11 (64 bit), Linux(Unbuntu 22.04)



SPÉCIFICATIONS TECHNIQUES

Display and touch	
Luminance	250cd/m ²
Backlighting	LED
Type of contact	True-Flat PCAP 10-point touch screen
Storage	
1 x M.2 PCIe SSD 240 GB (can be expanded to 512 GB)	
Expansion	
1 x M.2 A,E key (for WiFi/BT projects)	
Display	
Intel® Iris® Xe Graphics eligible	
I/O	
USB Port	3 x USB 2.0 3 x USB 3.1
COM port	2 x Port COM
USB-C	1 x Type C (DP+PD)
Audio	
Speaker output	2 x 2W
Certification Information	
CE / FCC Class A / LVD	
Ethernet	
Gigabit-LAN: support WOL, PXE	
Ethernet Interface	10/100/1000 Base-Tx GbE compatible
Power requirements	
Adapter	Input: 100 ~ 240Vac/ 50 ~ 60Hz Output: 90W adapter (19V adapter) AC-DC adapter
DC input connector	4 pin DIN
Mechanics and Environment	
Operating temperature	0°C ~ 40°C
Storage temperature	-20°C ~ 60°C
Operating humidity	10% ~ 90% Relative Humidity, Non-condensing
Weight	5.8 Kgs
Indice d'étanchéité	Front IP65
Kit de montage	Wall / Stand / VESA 75mm x 75mm
Construction - Avant & Arrière	Metal White
Dimension	509 x 305 x 48 mm